

BPS CLIMA[®]



air treatment
trattamento dell'aria

275 mm
H Max
150 Pa

MANUALE TECNICO: DIMENSIONI & DISEGNI
TECHNICAL MANUAL: DIMENSIONS & DRAWINGS

serie **CPM**

MT-D25-41025091-R00


101% MADE IN ITALY



UNITA CANALIZZABILI modulari - piatte/medie
TERMINAL UNITS modular - slim/medium

CPM-Z1/P1

Versione orizzontale, Aspirazione aria posteriore – SEMPLICE PANNELLO
Horizontal version, Rear air intake – SINGLE SKIN PANEL

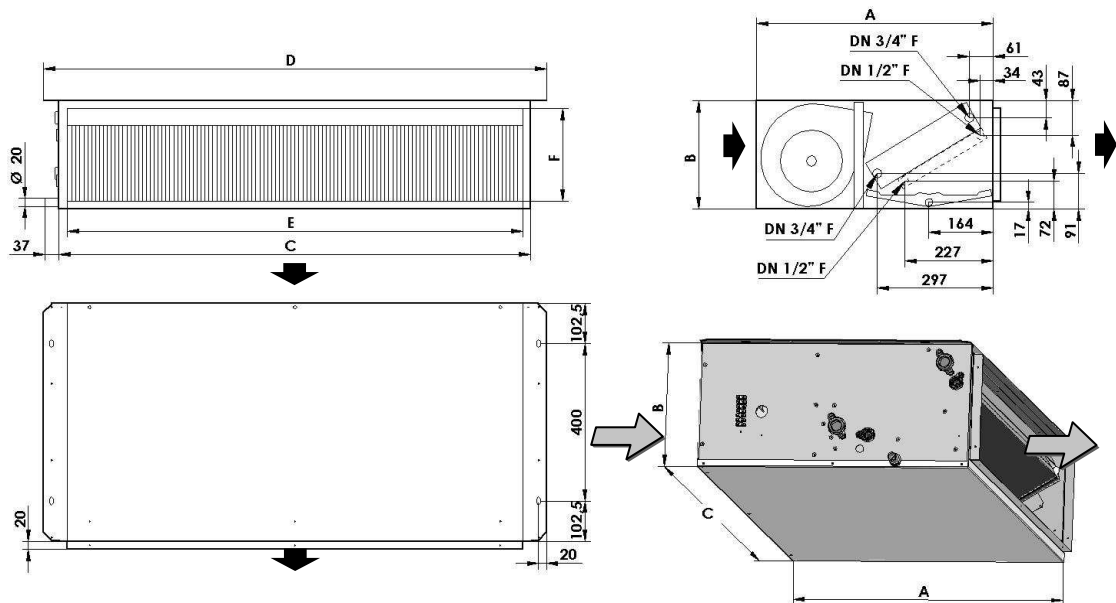


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	605	605	605	605	605	605	605	605	605
	B	mm	275	275	275	275	275	275	275	275	275
	C	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	D	mm	880	880	880	1.280	1.280	1.280	1.680	1.680	1.680
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	760	760	760	1.160	1.160	1.160	1.560	1.560	1.560
	F	mm	235	235	235	235	235	235	235	235	235
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	37	38	40	52	54	57	68	70
	4-Tubi / 4-Pipe (1R Heat)		Kg	39	40	/	55	57	/	72	74
	4-Tubi / 4-Pipe (2R Heat)		Kg	40	41	/	56	58	/	73	75

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-K1

Versione orizzontale, Aspirazione aria posteriore – DOPPIO PANNELLO
Horizontal version, Rear air intake – DOUBLE SKIN PANEL

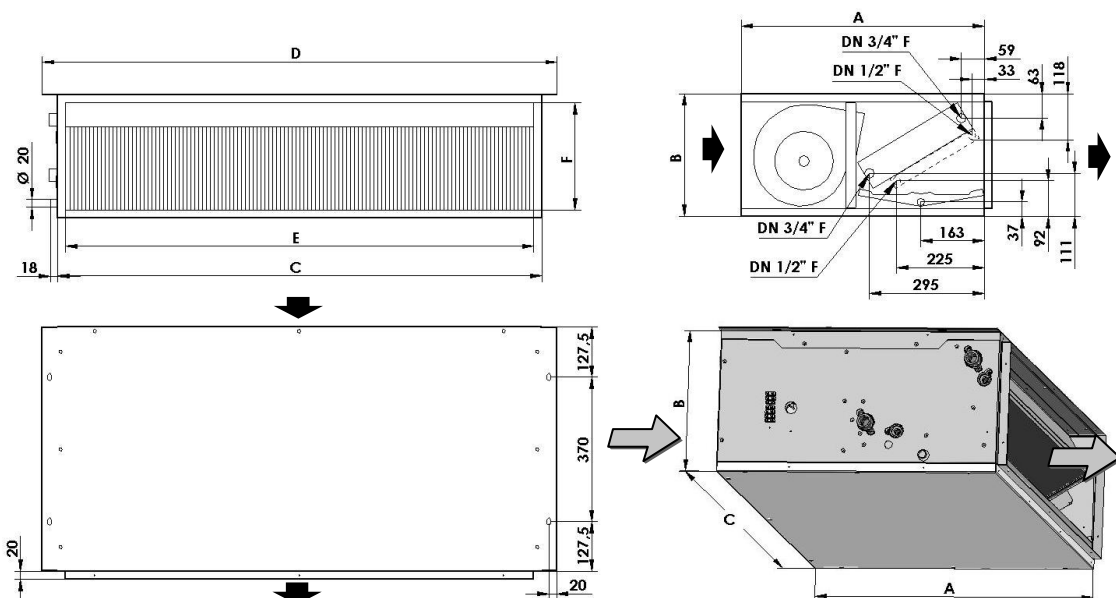


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	625	625	625	625	625	625	625	625	625
	B	mm	315	315	315	315	315	315	315	315	315
	C	mm	840	840	840	1.240	1.240	1.240	1.640	1.640	1.640
	D	mm	920	920	920	1.320	1.320	1.320	1.720	1.720	1.720
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	F	mm	275	275	275	275	275	275	275	275	275
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	52	53	55	71	73	76	91	93
	4-Tubi / 4-Pipe (1R Heat)		Kg	54	55	/	74	76	/	95	97
	4-Tubi / 4-Pipe (2R Heat)		Kg	55	56	/	75	77	/	96	98

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-Z2/P2

Versione orizzontale, Aspirazione aria frontale – SEMPLICE PANNELLO
Horizontal version, Frontal air intake – SINGLE SKIN PANEL

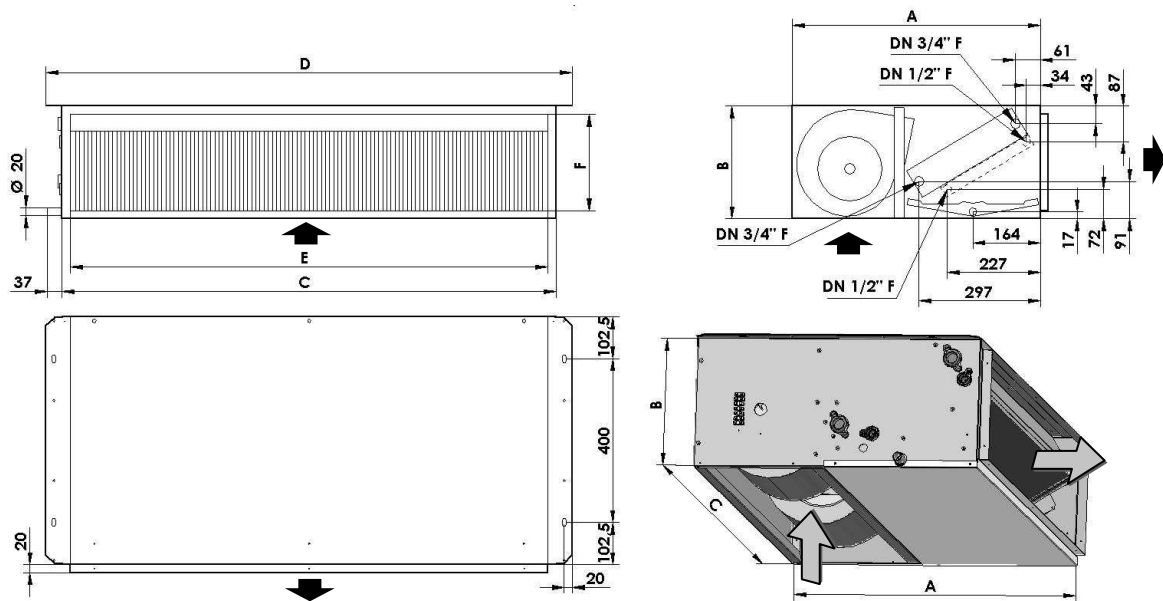


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	605	605	605	605	605	605	605	605	605
	B	mm	275	275	275	275	275	275	275	275	275
	C	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	D	mm	880	880	880	1.280	1.280	1.280	1.680	1.680	1.680
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	760	760	760	1.160	1.160	1.160	1.560	1.560	1.560
	F	mm	235	235	235	235	235	235	235	235	235
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	37	38	40	52	54	57	68	70
	4-Tubi / 4-Pipe (1R Heat)		Kg	39	40	/	55	57	/	72	74
	4-Tubi / 4-Pipe (2R Heat)		Kg	40	41	/	56	58	/	73	75

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-K2

Versione orizzontale, Aspirazione aria frontale – DOPPIO PANNELLO
Horizontal version, Frontal air intake – DOUBLE SKIN PANEL

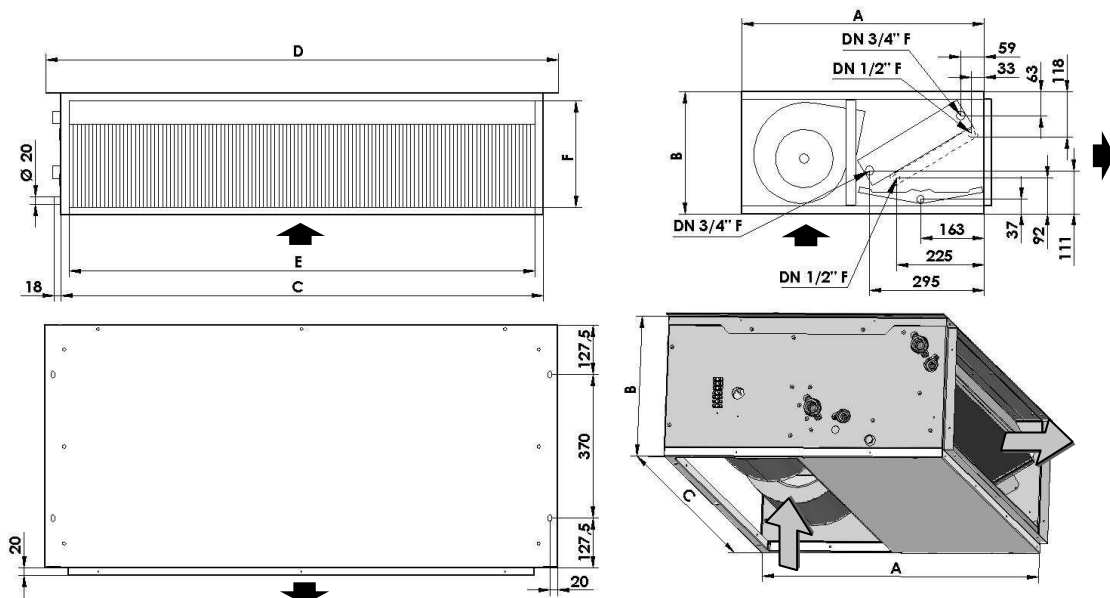


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	625	625	625	625	625	625	625	625	625
	B	mm	315	315	315	315	315	315	315	315	315
	C	mm	840	840	840	1.240	1.240	1.240	1.640	1.640	1.640
	D	mm	920	920	920	1.320	1.320	1.320	1.720	1.720	1.720
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	F	mm	275	275	275	275	275	275	275	275	275
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	52	53	55	71	73	76	91	93
	4-Tubi / 4-Pipe (1R Heat)		Kg	54	55	/	74	76	/	95	97
	4-Tubi / 4-Pipe (2R Heat)		Kg	55	56	/	75	77	/	96	98

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-Z21/P21

Versione verticale, Aspirazione aria inferiore – SEMPLICE PANNELLO
Vertical version, Bottom air intake – SINGLE SKIN PANEL

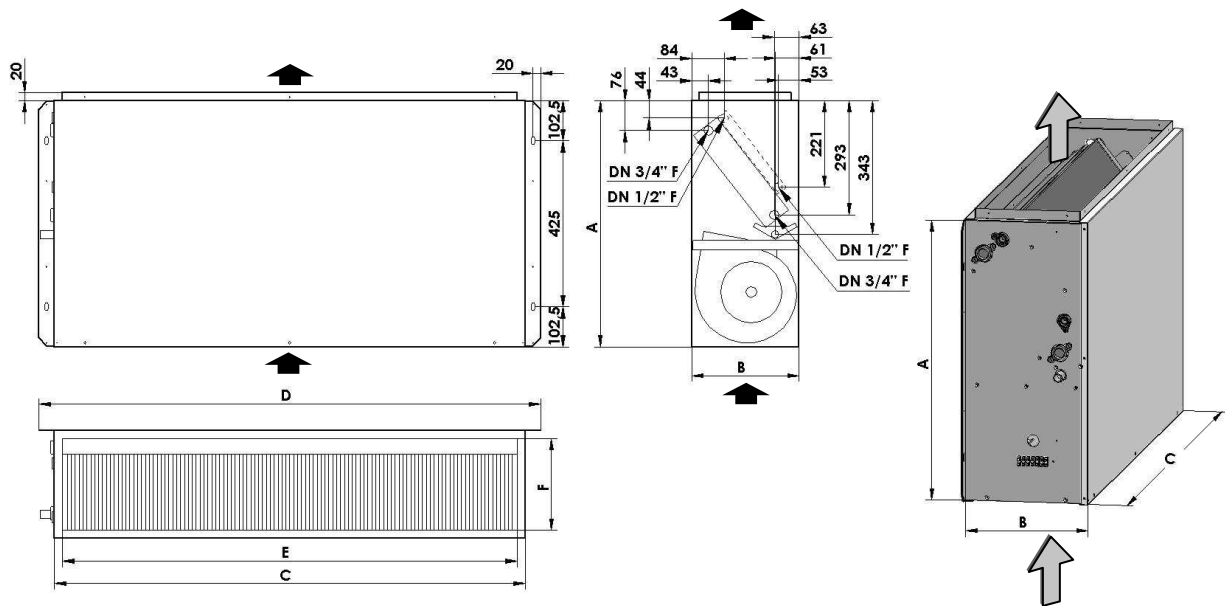


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	630	630	630	630	630	630	630	630	630
	B	mm	275	275	275	275	275	275	275	275	275
	C	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	D	mm	880	880	880	1.280	1.280	1.280	1.680	1.680	1.680
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	760	760	760	1.160	1.160	1.160	1.560	1.560	1.560
	F	mm	235	235	235	235	235	235	235	235	235
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	37	38	40	52	54	57	68	70
	4-Tubi / 4-Pipe (1R Heat)		Kg	39	40	/	55	57	/	72	74
	4-Tubi / 4-Pipe (2R Heat)		Kg	40	41	/	56	58	/	73	75

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-K21

Versione verticale, Aspirazione aria inferiore – DOPPIO PANNELLO
Vertical version, Bottom air intake – DOUBLE SKIN PANEL

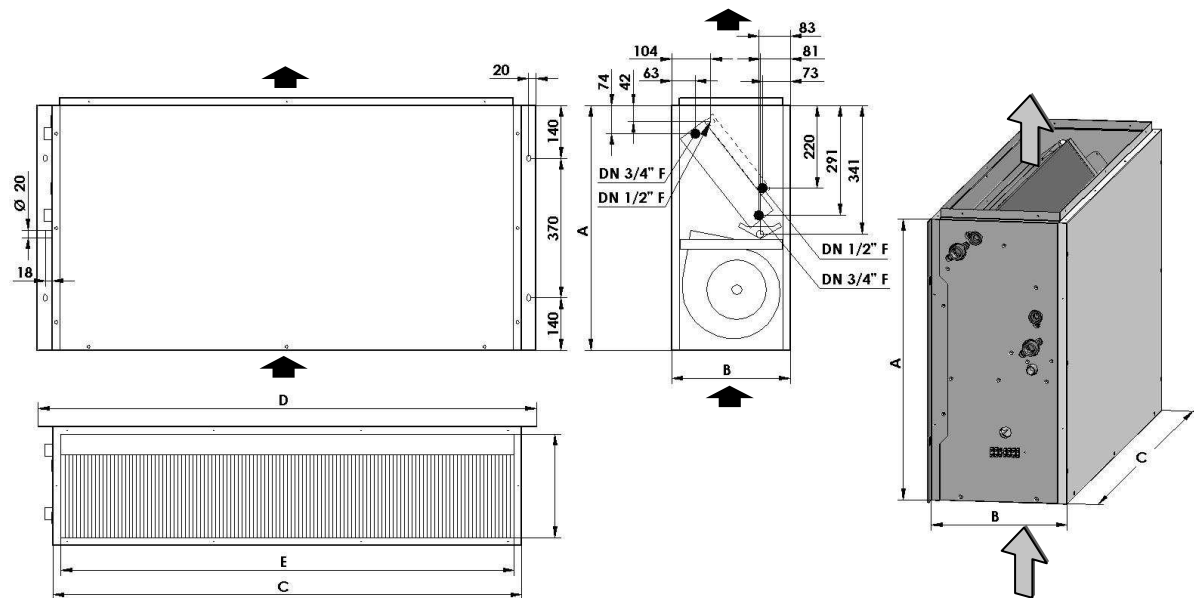


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	650	650	650	650	650	650	650	650	650
	B	mm	315	315	315	315	315	315	315	315	315
	C	mm	840	840	840	1.240	1.240	1.240	1.640	1.640	1.640
	D	mm	920	920	920	1.320	1.320	1.320	1.720	1.720	1.720
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	F	mm	275	275	275	275	275	275	275	275	275
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	52	53	55	71	73	76	91	93
	4-Tubi / 4-Pipe (1R Heat)		Kg	54	55	/	74	76	/	95	97
	4-Tubi / 4-Pipe (2R Heat)		Kg	55	56	/	75	77	/	96	98

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-Z22/P22

Versione verticale, Aspirazione aria frontale – SEMPLICE PANNELLO
Vertical version, Frontal air intake – SINGLE SKIN PANEL

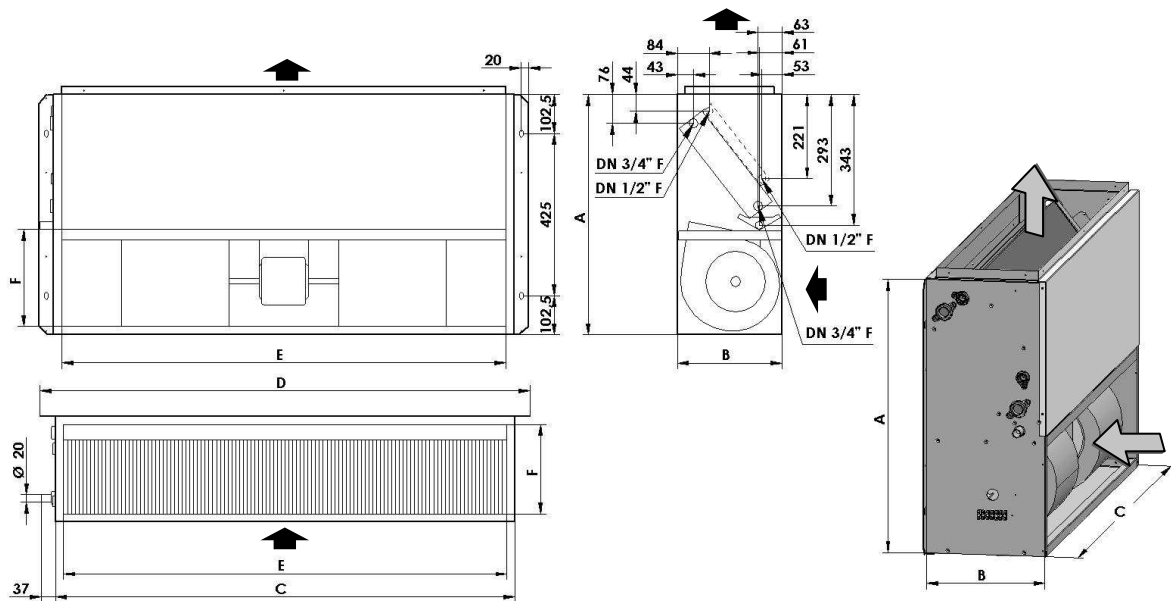


Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	630	630	630	630	630	630	630	630	630
	B	mm	275	275	275	275	275	275	275	275	275
	C	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	D	mm	880	880	880	1.280	1.280	1.280	1.680	1.680	1.680
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	760	760	760	1.160	1.160	1.160	1.560	1.560	1.560
	F	mm	235	235	235	235	235	235	235	235	235
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	37	38	40	52	54	57	68	70
	4-Tubi / 4-Pipe (1R Heat)		Kg	39	40	/	55	57	/	72	74
	4-Tubi / 4-Pipe (2R Heat)		Kg	40	41	/	56	58	/	73	75

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

CPM-K22

Versione verticale, Aspirazione aria inferiore – DOPPIO PANNELLO
Vertical version, Bottom air intake – DOUBLE SKIN PANEL

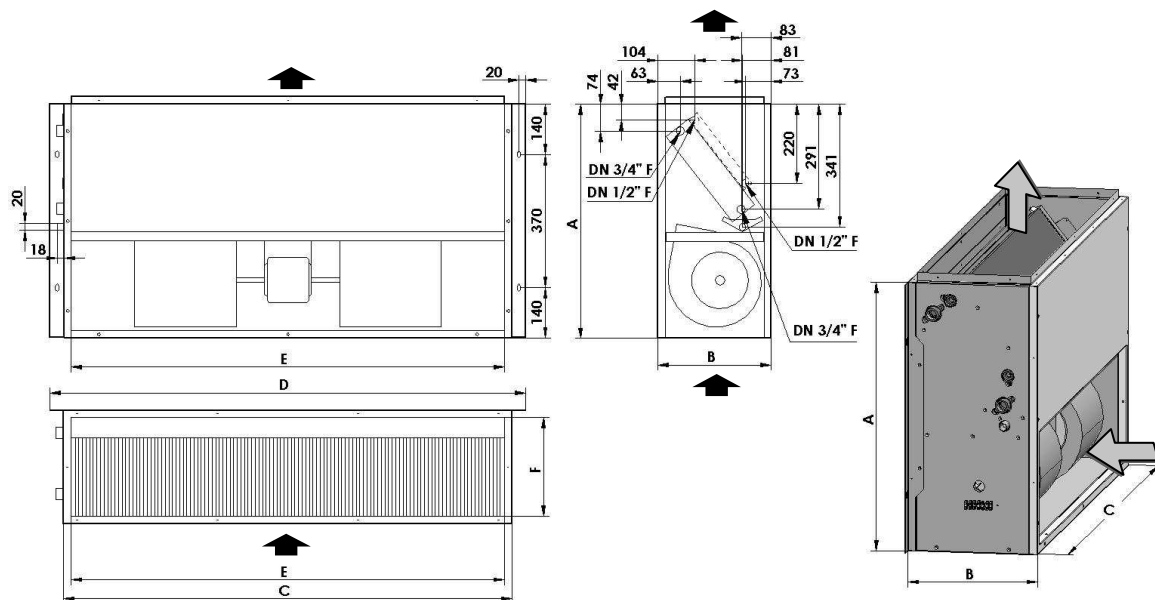

Mod.	2-Tubi / 2-Pipe		CPM122	CPM132	CPM142	CPM222	CPM232	CPM242	CPM322	CPM332	CPM342
	4-Tubi / 4-Pipe (1R Heat)		CPM124	CPM134	/	CPM224	CPM234	/	CPM324	CPM334	/
	4-Tubi / 4-Pipe (2R Heat)		CPM125	CPM135	/	CPM225	CPM235	/	CPM325	CPM335	/
Dimensioni principali Main dimensions	A	mm	650	650	650	650	650	650	650	650	650
	B	mm	315	315	315	315	315	315	315	315	315
	C	mm	840	840	840	1.240	1.240	1.240	1.640	1.640	1.640
	D	mm	920	920	920	1.320	1.320	1.320	1.720	1.720	1.720
Bocche aspirazione/mandata Air intake/supply outlets (1)	E	mm	800	800	800	1.200	1.200	1.200	1.600	1.600	1.600
	F	mm	275	275	275	275	275	275	275	275	275
Peso netto Net weight	2-Tubi / 2-Pipe		Kg	52	53	55	71	73	76	91	93
	4-Tubi / 4-Pipe (1R Heat)		Kg	54	55	/	74	76	/	95	97
	4-Tubi / 4-Pipe (2R Heat)		Kg	55	56	/	75	77	/	96	98

(1) Attacchi canale a BAIONETTA: Bocca mandata maschio; Bocca aspirazione femmina – Duct NESTING connections: Male air supply outlet; Female air intake suction

air treatment
trattamento dell'aria



BPS S.r.l. - Zona Industriale Biban, 56 - 31030 Carbonera (TV) - Italy
Tel.: +39 0422-445363 r.a. - Fax.: +39 0422-398646
www.bpstecnologie.com - e-mail: info@bpstecnologie.com